



DEPARTMENT OF THE NAVY

COMMANDER
SECOND NAVAL CONSTRUCTION BRIGADE
1310 8TH STREET SUITE 100
NORFOLK, VIRGINIA 23521-2435
AND
COMMANDER
THIRD NAVAL CONSTRUCTION BRIGADE
NAVAL STATION
PEARL HARBOR, HI 96860-7305

COMSECONDNCB/COMTHIRDNCBINST 11100.1

N3
JAN 13 1997

COMSECONDNCB/COMTHIRDNCB INSTRUCTION 11100.1

Subj: PROJECT SIGN DESIGN

1. Purpose. To establish a standard project sign design for all Naval Construction Force projects.

2. Background. Over the years, Seabee project sign designs have evolved, yet there is no documented standard. Project signs routinely are uniform in size (4'x8') and color. However, a variety of lettering and letter styles are arising as well as varying quality.


3. Action. The project sign is the first view of a project by customers and visitors. A poor quality project sign gives a negative impression of the Seabees and their capabilities. To provide a positive image, the attached standard design figures (1-3) shall be used on all SECOND and THIRD Brigade unit's construction projects.


a. In the interest of minimizing cost, reuse signage material whenever feasible. Use a conservative evaluation of material condition before reuse. Previously damaged, weathered or worn material should be replaced. The project sign must be completely repainted between uses.

b. Use of detachable placecards for project title, crew leader, safety petty officer and other writing is authorized.

c. Encourage the use of unit and safety decals on all signs.

4. Implementation. This instruction is effective for all new project signs upon receipt. It is not necessary to replace existing signs for ongoing projects.

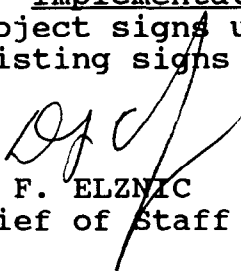
D. F. ELZNIC
Chief of Staff

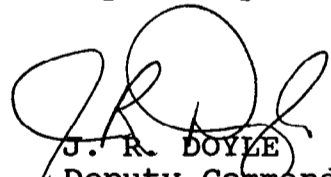
J. R. DOYLE
Deputy Commander

Distribution:
COMSECONDNCB/COMTHIRDNCBINST 5216.1B
List I (I)
List II
List IV

UNIT SEAL

SAFETY DECAL



3/4" X 2 1/4" MOULDING

1. COLOR SCHEDULE: CONFORM TO FED STANDARD 595A- BACKGROUND SHALL BE GLOSS WHITE (No. 17875), LETTERING AND BORDER GLOSS BLACK
2. LETTERING SHALL BE HELVETICA MEDIUM. ALL UPPER CASE
3. PAINTING SCHEDULE: PLYWOOD SURFACE- ONE COAT PRIMER SEALER, MILSPEC MIL-P-28582, TWO COATS EXTERIOR ALKYD PAINT, FED SPEC TT-P-102
4. PRESERVATIVE TREAT ALL WOOD SURFACES BURIED IN OR IN CONTACT WITH THE EARTH
5. ALL FASTENINGS SHALL BE GALVANIZED - COATED
6. LUMBER - NON STRESS GRADE

Figure 1

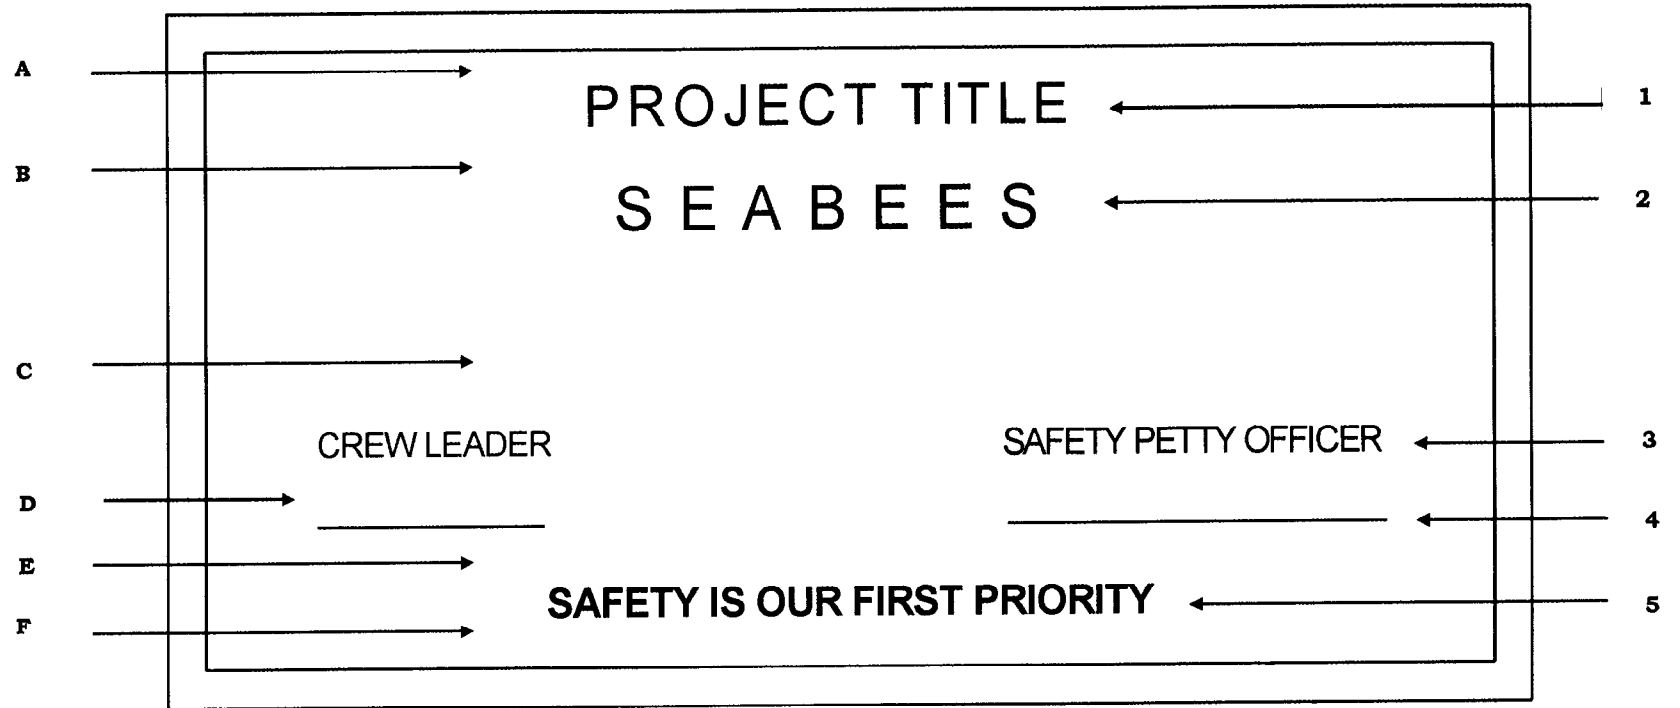



Figure 2

SPACE	HEIGHT
A	2 1/2"
B	3"
C	15 1/2"
D	1"
E	4"
F	2 1/2"

LINE	DESCRIPTION	LETTER HEIGHT
1	PROJECT TITLE	2 3/4"
2	SEABEES	4"
3	POSITIONS ASSIGNED	2 3/4"
4	PERSONNEL ASSIGNED	2 3/4"
5	SAFETY STATEMENT	2 3/4"

ALL LETTERING CENTERED ABOUT THE VERTICAL CENTERLINE

JAN 18 1968

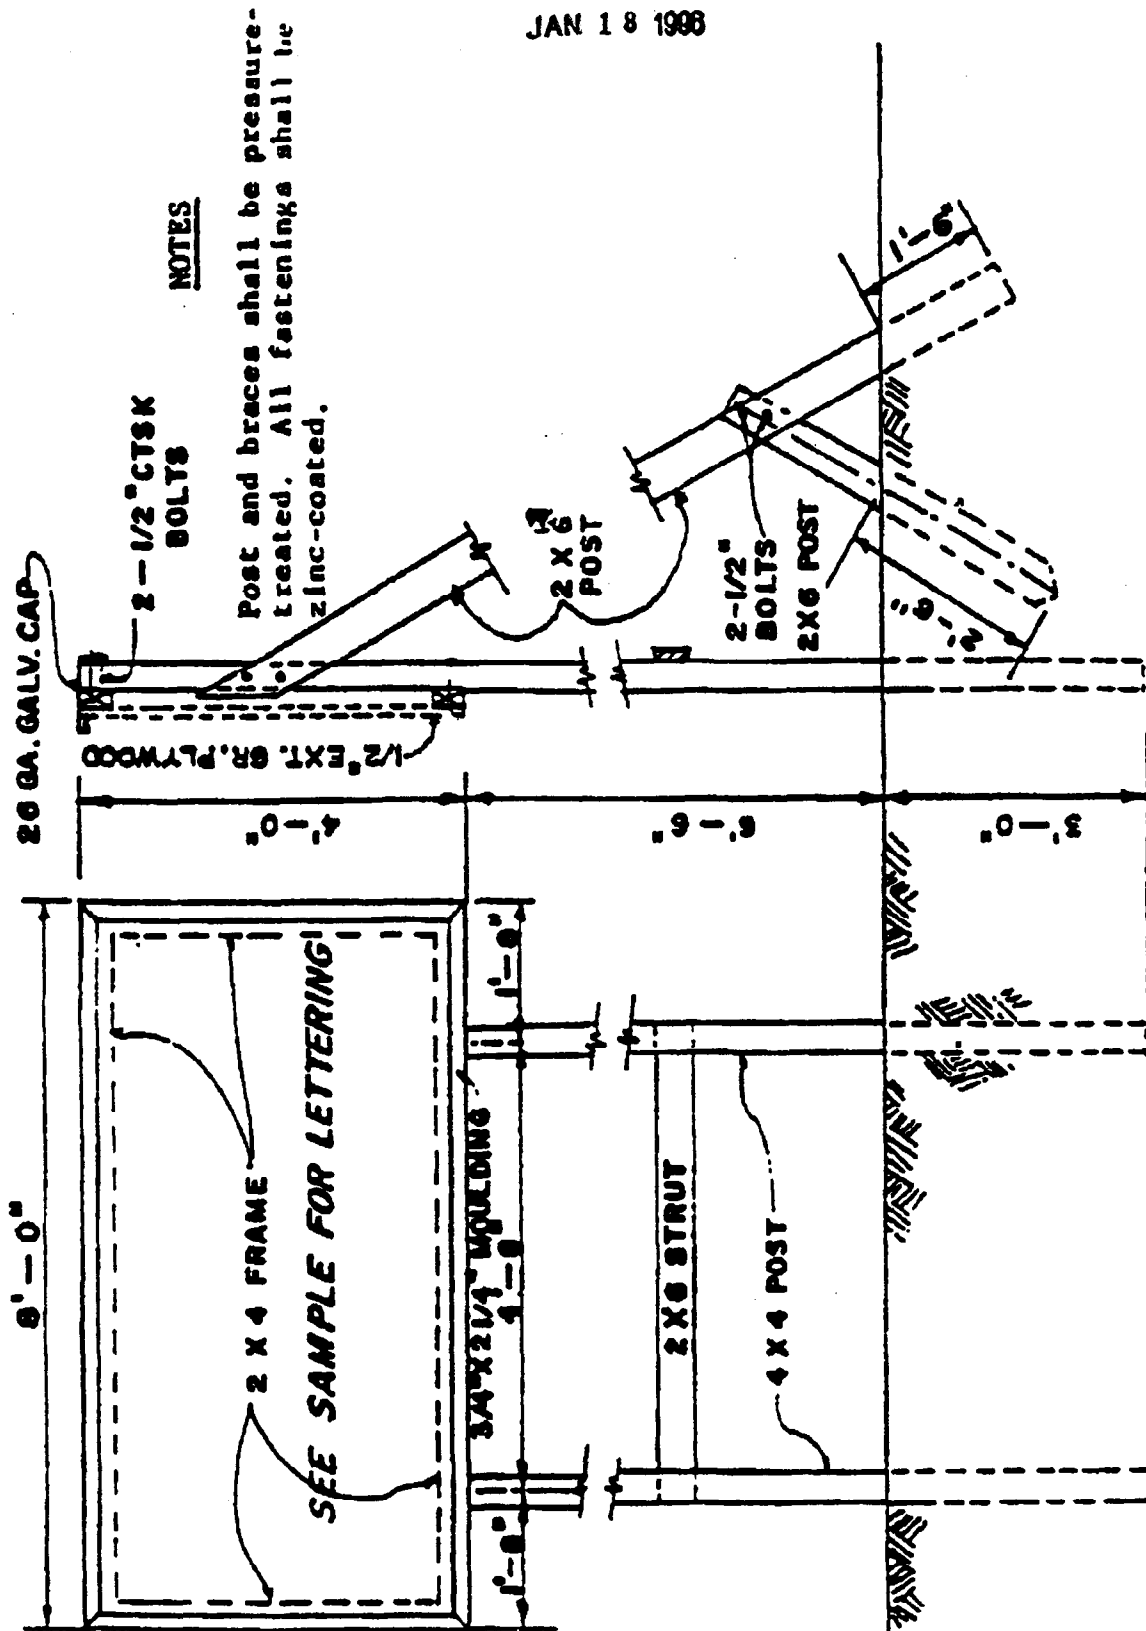

NOTES

Post and braces shall be pressure-treated. All fastenings shall be zinc-coated.

TYPICAL CONSTRUCTION SIGN

NOT TO SCALE

Figure 3